

AIR COOLED DIESEL ENGINE FOR PUMPSETS

Irrigating Smiles

IML 400


IML 500

Latest Design & Technology

Direct Injection

Low Maintenance
Easy to Service

Light Weight
Cost Effective

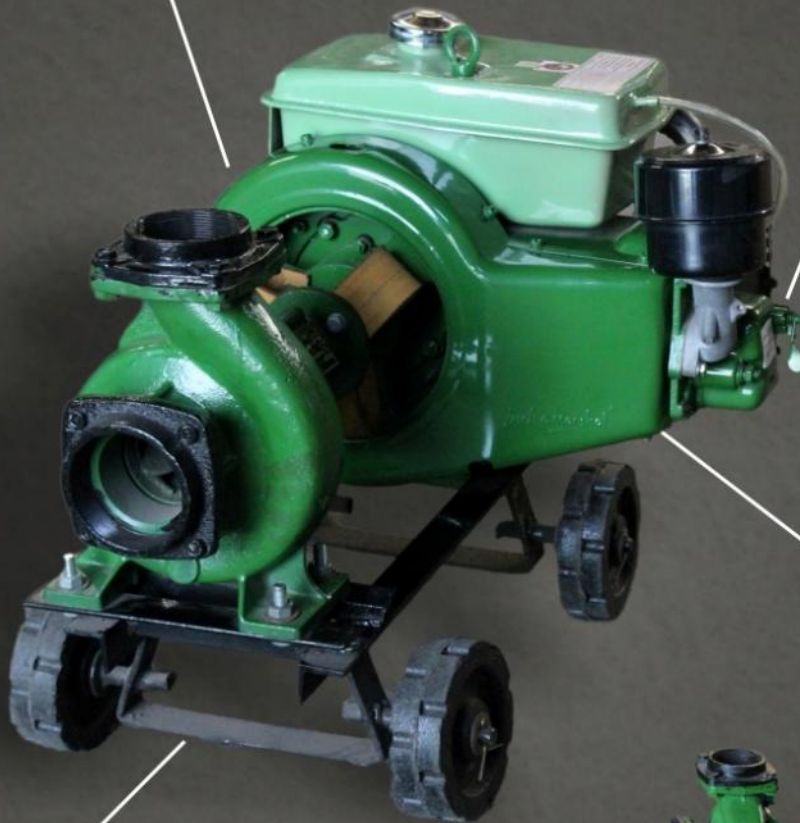

INDRA MARSHAL POWER PVT. LTD.

IS : 11170-1985
CML : 1926867

IMPROVING AGRICULTURE, IMPROVING LIVES.

ENGINGS SPECIFICATIONS

MODEL	IML 400	IML 500
Type	Single cylinder, 4-Stroke, Horizontal, Air Cooled	
Bore & Stroke (mm)	70 x 70	75 x 75
Compression Ratio	22:1	22:1
Declared Power (HP/KW)	4/2.9	5/3.7
Declared Speed (RPM)	2600	2600
Specific fuel Consumption (g/km-h)	279	287
Fuel Tank Capacity (Ltr.)	4.5	4.5
Starting method	Hand Starting	
Net weight (kg)	44	50
Lub. oil Sump Capacity (Ltr.)	1.2	1.4
Overall dim. (mm) (L x W x H)	520x335x425	540x330x420

PUMP SPECIFICATIONS

MODEL	IM 3030/ IM 3030 OS	IM 3025/ IM 3025 OS	IM 3025HH	ILP 3025
Size (inch/mm)	3"x3"/80x80	3"x2.5"/80x65	3"x2.5"/80x65	3"x2.5"/80x65
Pump Type	Centrifugal/Non Self Priming/Without Flange	Centrifugal/Non Self Priming/Without Flange	Centrifugal/Non Self Priming/With Flange	Centrifugal/Non Self Priming/With Flange
Head Range (m)-4 HP	9-20	8-20	8-30	7-18
Head Range (m)-5 HP	10-26	9-28	9-36	7-28
Discharge Range (LPS)-4 HP	14-4	15-6	14-5	15-5
Discharge Range (LPS)-5 HP	16-7	16-10	18-5	16-7
Packing	Oil Seal	Oil Seal	Gland	Mech. Seal
Total Weight - 4HP Pump Set(kg)Appx.	62	62	72	61
Total Weight - 5HP Pump Set(kg)Appx.	68	68	78	67

Manufactured By : Indra Marshal Power Pvt. Ltd

(Formerly known as Indra Marshall Oil Engines)

Regd. Office & Works : 13 B, Sector - 'A', Industrial Area, Sanwer Road, Indore - 452015 (M.P.)

+91-731-3314111 / 114, Fax : +91-731-3314104, 1800 200 5003

care@indramarshal.com, indramarshall@yahoo.co.in, +91-9111999700

www.indramarshal.com

AUTHORISED DEALER



*Technical Specifications Subject to change Due to improvements.